





CUSTOMER DRAWING

P/N: 3000H 112A/-7


REV
J

PART NO.	MATERIAL	FINISH
3000H 112A-7	.016 ±.0007 BRASS PRETINNED	SEE MAT'L
3000H 112AB-7	.016 ±.0007 BRASS	NONE
3000H 112AD-7	.016 ±.0007 BRASS	POST TIN PLATE


**ARK-LES
UNCONTROLLED**

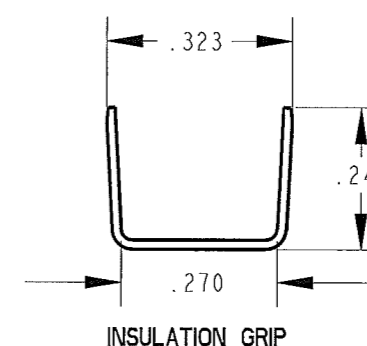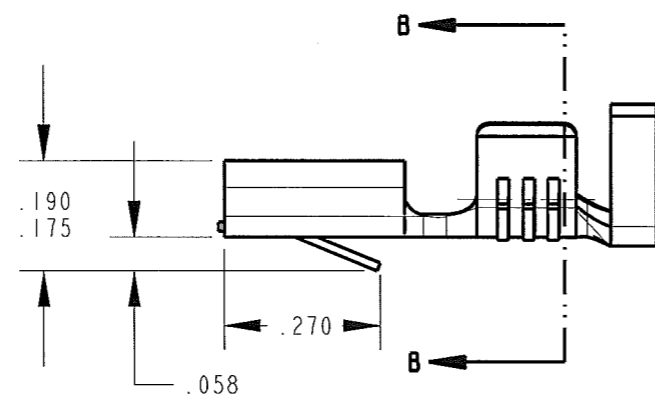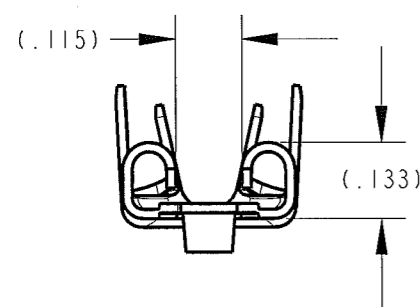

- NOTES:
1. TO MATE WITH .250 X .032 MALE TAB.
 2. TO ACCOMMODATE AWG #16-#12 WIRE OR (2) AWG #14 WIRE OR (2) AWG #18 WIRE.
 3. INSULATION RANGE: .100-.175 DIA.
 4. RECOMMENDED WIRE STRIP LENGTH: $9/32 \pm 1/32$.
 5. INITIAL INSERTION 8 LBS. MAX., 4 LBS. MIN. USING STANDARD .250 X .032 BRASS TAB.

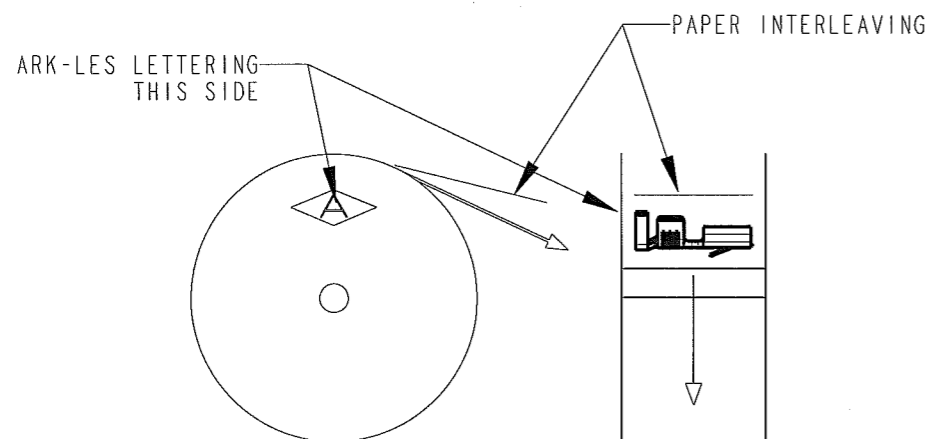

STANDARD REELING DIAGRAM

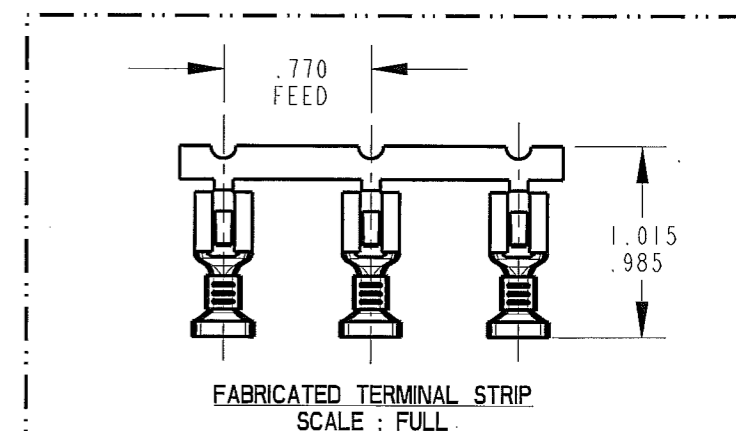

				PRINT DIST.	PROD. REL.	RM 2093	6/18/90	CHK'D	TOLERANCES UNLESS OTHERWISE SPECIFIED	DECIMALS ±.010 METRIC ±0.25mm			STOUGHTON, MA	
				DEPT #	QUOTE REL.			APP.						
				ENG	DRAWN BY D.O'NEILL 3/16/05			APP.	OTHERWISE SPECIFIED		ORIGINAL IF RED			
				SALES	SUPERSEDES DWG. DATED: 9/13/01			APP.	METRIC ±0.25mm		PART NAME CUSTOMER DRAWING			
J	REV. PER ECR# S000192	6/01/06	DON	STO	SCALE 3:1			DO NOT SCALE PRINT		ANGLES ±1°		TERMINAL, FEMALE LOCKING TYPE		
H	REV/REDWN ECR# S000182	3/16/06	DON	RAL	MATERIAL: SEE TABLE					CAD#: 3000H_112A-7-REVJ_CUST				
REV.	DESCRIPTION	DATE	DR.	JZ	FINISH: SEE TABLE					P/N: 3000H 112A/-7		REV J		